

LED T8 低壓燈管




LED T8 Low Voltage Tube

Series Type: EL-T8-ZL

- 外殼鋁型材+PC結構，散熱效能好
- 可以直接使用DC12-36V電源或者蓄電池即可點亮，應用方便，使用安全
- 可以配真太陽能供電照明
- 燈膽壽命高達 50000 小時
- 低壓直流DC12-36V供電，適用於安全低壓照明場所，以及夜市、野外活動和市電經常停電等地方照明

- Shell aluminum profile + PC structure, good heat dissipation
- It can be turned on directly by using DC12-36 power supply or battery
- Can be equipped with solar powered lighting
- Lamp life up to 50000 hours
- Low voltage DC 12-36v power supply is suitable for safe low-voltage lighting places, night markets, outdoor activities and frequent power outages

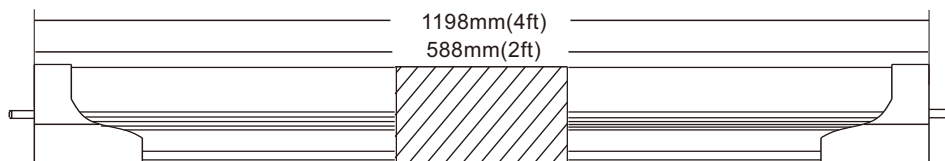

Cross-sectional

Model 產品型號	Voltage 電壓 (V)	Power 功率 (W)	Power Factor 功率因數	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色指數 (CRI)	Colour Temp 色溫 (K)	Length 長度 (mm)	LED Qty 燈珠數量 (pcs)	PCS/CTN 每箱數量 (pcs)
EL-T80609A-ZL	DC12-36	9 ±5%	1	80-100	Ra>80	3000~6500	588	60	30
EL-T81218A-ZL	DC12-36	18 ±5%	1	80-100	Ra>80	3000~6500	1198	96	30
EL-T80609B-ZL	DC12-36	9 ±5%	1	100-120	Ra>80	3000~6500	588	60	30
EL-T81218B-ZL	DC12-36	18 ±5%	1	100-120	Ra>80	3000~6500	1198	96	30