

LED T5 一體燈管




LED T5 Integrated Lamp Tube

Series Type: EL-T5-YTH

- 採用燈管和支架一體化設計, 安裝時無需配置支架
- 鋁塑材質: 外殼鋁型材+PC結構
- 可通過耐壓測試, 安全性能好
- 散熱性能好, 經久耐用, 燈膽壽命高達50000小時, 適用於工程照明

- The integrated design of lamp tube and bracket is adopted, and there is no need to configure bracket during installation
- Aluminum plastic material: outer aluminum profile + PC structure
- It can pass the withstand voltage test and has good safety performance
- Good heat dissipation performance, durable, and the lamp life is up to 50000 hours, suitable for engineering lighting

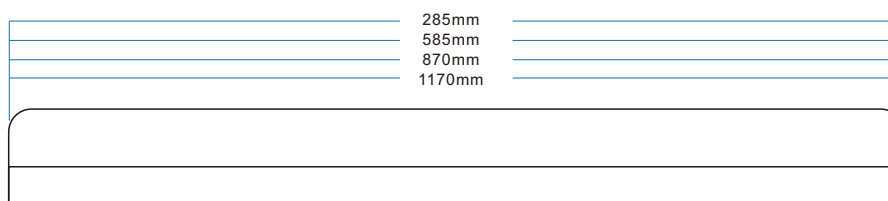

Cross-sectional

Model 產品型號	Voltage 電壓 (V)	Power 功率 (W)	Power Factor 功率因數	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色指數 (CRI)	Colour Temp 色溫 (K)	Length 長度 (mm)	LED Qty 燈珠數量 (pcs)	PCS/CTN 每箱數量 (pcs)
EL-T50608A-YTH	AC180-260	4±5%	>0.5	100	Ra>80	3000~6500	285	24	60
EL-T50912A-YTH	AC180-260	8±5%	>0.5	100	Ra>80	3000~6500	585	48	30
EL-T50912A-YTH	AC180-260	12±5%	>0.5	100	Ra>80	3000~6500	870	72	30
EL-T51216A-YTH	AC180-260	16±5%	>0.5	100	Ra>80	3000~6500	1170	96	30
EL-T50304B-YTH	AC180-260	4±5%	>0.5	120	Ra>80	3000~6500	285	24	60
EL-T50608B-YTH	AC180-260	8±5%	>0.5	120	Ra>80	3000~6500	585	48	30
EL-T50912B-YTH	AC180-260	12±5%	>0.5	120	Ra>80	3000~6500	870	72	30
EL-T51216B-YTH	AC180-260	16±5%	>0.5	120	Ra>80	3000~6500	1170	96	30